


## Cylinders (custom)

LPG storage cylinders are produced according to EN 1442, in accordance with European Directive 2010/35/EU (TPED).

Operating temperature -20, +65

The outer surface of the cylinders is protected by a polyester powder paint ensuring a minimum thickness of 60 Qm.

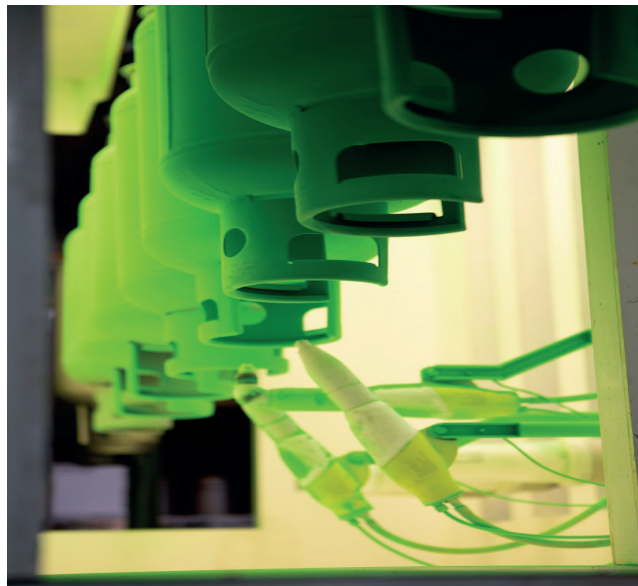

## Tecnical information

### Drums

Capacity lt.	A mm	B mm	C mm
923	2.229	834	800
920	2.229	840	800

### Colors

Ogive color code	Content
green Ral 6018	Refrigerant, Toxic - Corrosive
yellow Ral 1018	Refrigerant, Non-flammable Gas
red RAL 3000	Refrigerant, Flammable Gas